



(11) **EP 0 991 072 A1**

BEST AVAILABLE COPY

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.04.2000 Bulletin 2000/14

(51) Int. Cl.⁷: **G11B 27/32, G11B 20/12,
G11B 27/10**

(21) Application number: **98250387.2**

(22) Date of filing: **04.11.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **07.09.1998 EP 98250315**

(71) Applicant:
**DEUTSCHE THOMSON-BRANDT GMBH
78048 Villingen-Schwenningen (DE)**

(72) Inventors:
• **Winter, Marco
30173 Hannover (DE)**
• **Schiller, Harald Dr.
30539 Hannover (DE)**
• **Keesen, Werner Dr.
30173 Hannover (DE)**

(74) Representative:
**Hartnack, Wolfgang, Dipl.-Ing.
Deutsche Thomson-Brandt GmbH
European Patent Operations
Karl-Wiechert-Allee 74
30625 Hannover (DE)**

(54) **Method for addressing a bit stream recording**

(57) In bitstream recording presentation data is organised into Video Object Units. These have a variable size but have also a variable duration. To allow access to any Video Object Unit in the bitstream a housekeeping address table is used which is based on pieces (VOBU#n) of the bitstream of constant size per piece. The address table additionally contains for each of these pieces a specific delta duration ($\Delta DUR\#n$) which indicates the arrival time difference between the last and the first packet contained in a piece. The computation of the target VOB address includes the following steps:

- accumulate the delta durations until the given time value is most closely reached towards the target VOB;
- the running index of this table entry multiplied by the constant piece size directly results in the address value to be accessed.

	VOBU#n	$\Delta DUR\#n$
DAV →	VOBU#i	$\Delta DUR\#i$
	VOBU#3	$\Delta DUR\#3$
	VOBU#2	$\Delta DUR\#2$
	VOBU#1	$\Delta DUR\#1$

Fig. 5

EP 0 991 072 A1

Description

[0001] The invention relates to a method and to an apparatus for addressing a bitstream to be recorded or being recorded on a storage medium, e.g. an optical disc.

Background

[0002] In bitstream recording one is free to subdivide the bitstream into sub-units of more regular structure. Presentation data in DVDs (digital video or versatile disc) is organised into units called Video Object Unit, denoted VOB, e.g. in the RTRW Specification for Realtime Rewritable Video DVDs. VOBs have a variable size (data amount measured in number of sectors), but have also a variable duration (measured in number of video fields). For data retrieval from the disc the RTRW specification foresees a 'VOB map' which is a table where for every VOB in a recording the length in sectors and the duration in fields is entered.

Invention

[0003] A table for data retrieval from a storage medium can be based on bitstream data being subdivided into pieces of constant duration. 'Duration' means the difference between the arrival time of the last packet of a piece and the arrival time of the first packet of that piece.

'Housekeeping' in the general context of either RTRW recording or Stream recording is the task to translate a given time value (presentation time in case of RTRW recording or packet arrival time in case of Stream recording) into a disc address value where the desired data can be found.

[0004] In such systems the VOB map or 'housekeeping address table', denoted HAT, can contain a specific size or a specific offset or a specific delta size or, in general, a specific address-like quantity for each of these constant-duration pieces. By storing delta values instead of the total duration at a current VOB these entries can be described with shorter word length which helps to keep the total VOB map in a reasonable size.

A possible type of housekeeping process for these systems could include the following steps:

- By division and truncation, calculate from the given time value the index of the table entry to be looked up.
- The content of the table entry either directly specifies the address value to access, or all table entries up to that index have to be accumulated to get the address value to be accessed.

[0005] The big disadvantage of such type of HAT which is based on constant-duration pieces lies in the following:

- In case of a low bitrate recording the pieces of constant duration will be small in size, i.e. every piece will comprise a few data sectors only or, in the extreme, a fraction of a data sector only. The disc can contain enormous numbers of those pieces, so that the HAT may become too big to be kept in the memory.
- In case of high bitrate recording, the pieces of constant duration are big in size, i.e. each piece will comprise many data sectors. Then, addressing one piece or another corresponds to a very coarse addressing on the (sector) scale, i.e. a piece address derived from the HAT can be located many sectors away from the currently desired location.

[0006] Therefore housekeeping based on constant-duration pieces can result in a too big HAT in some cases (up to one half of the disc capacity), and can result in too coarse addressing in other cases.

[0007] It is one object of the invention to disclose a method for assigning to a given time value a storage medium address value which method avoids such disadvantages. This object is achieved by the method disclosed in claim 1.

[0008] According to the invention the housekeeping address table HAT is based on pieces of constant length or size, i.e. a constant number of bits per piece.

In a medium like DVD-RAM where data are physically organised into 'ECC blocks' (ECC: error correction code) of 32kByte length each, particular advantages result if the above constant size or a multiple of it is used as the constant size of a piece. However, any other constant size can be used. In this case of pieces of constant size the HAT contains for each of these pieces of constant size a specific absolute duration or, preferably, a specific delta duration which indicates the arrival time difference between the last and the first packet contained in a piece.

The housekeeping process, i.e. the computation of the target VOB address includes the following steps:

- Accumulate the delta durations contained in the HAT until the given time value is most closely reached towards the target VOB, i.e. until the sum of delta durations is less than or equal to the given time value assuming that forward scanning of the VOB entries is performed, or until the sum of delta durations is greater than or equal to the given

time value assuming that backward scanning of the VOB entries is performed.

- The running index of this table entry multiplied by the constant piece size directly results in the address value to be accessed.

[0009] The advantages of the inventive constant-size based HAT are:

- the HAT size does not depend on the bitrate of the recordings,
- the HAT addressing accuracy is constant, the granularity basically corresponds to the 'piece size constant' which can be chosen as appropriate to be constant for all types of discs, to be constant per disc, or to be constant per recording on a specific disc.

[0010] In principle, the inventive method is suited for addressing a bitstream to be recorded or being recorded on a storage medium, e.g. a DVD recorder, wherein an address table is used that is based on pieces of said bitstream, and wherein:

- said pieces each include a constant amount of bits of said bitstream;
- to each address table entry for said pieces an absolute time duration or a delta time duration is assigned in said address table using a running index;
- in case of absolute time duration values storage: in order to get an address value for reaching a target address the nearest corresponding absolute time duration entry of said address table is selected and the corresponding running index becomes multiplied by said constant amount in order to compute said address value, or,
- in case of delta time duration values storage: in order to get an address value for reaching a target address all delta time durations up to the nearest time duration corresponding to said address value become accumulated and the running index corresponding to the delta time duration entry related to said nearest time duration becomes multiplied by said constant amount in order to compute said address value.

[0011] Advantageous additional embodiments of the inventive method are disclosed in the respective dependent claims.

Drawings

[0012] Embodiments of the invention are described with reference to the accompanying drawings, which show in:

- Fig. 1 simplified overall system for DVD Stream Recording;
- Fig. 2 basic directory and file structure;
- Fig. 3 navigation data structure;
- Fig. 4 stream pack;
- Fig. 5 inventive housekeeping address table;
- Fig. 6 Stream Time Map Information;
- Fig. 7 mapping list example.

Exemplary embodiments

[0013] The DVD Stream Recording system is designed to use rewritable DVD discs for recording existing digital bitstreams, editing them and playing them back as bitstreams. The following abbreviations are used: LB: Logical Block, RBN: relative byte number, RBP: relative byte position, RLBN: relative logical block number, STB: set top box, TOC: table of content, SCR: system clock reference.

[0014] This system is designed to satisfy the following requirements:

Any packet size is supported as long as it is less than 2kByte and of constant length within a take.

A timing mechanism, i.e. a time stamp is added to every broadcast packet to enable proper packet delivery during playback.

To enlarge the fields of applications, non-real-time recording should be possible. However, in this case the STB has to generate the Time Stamp information.

Data allocation strategy and file support real-time stream recording.

Many digital services require Service Information which normally is embedded in the real-time stream. To support a STB fed by data from a DVD player, the DVD should provide additional space, which can be used by the STB to duplicate part of the service information and to add additional TOC information.

Copy Protection must be supported. In addition, any scrambling performed by the service provider or the STB must be

kept unchanged.

User requirements can be grouped into requirements for recording, requirements for playback, and requirements for editing:

5 *Real-time Recording*

[0015] The system should be designed to enable real-time recording of digital streams. It also should allow the user to concatenate recordings, even if those recordings consist of different stream formats. If recordings are concatenated, a seamless or close to seamless playback possibility would be nice but is not required.

10

Navigation Support

[0016] To support navigation two pieces of information (lists) should be generated during recording:

15

1) An 'original' version of a play list. This list contains quite low level information, e.g. time map or (broadcast) packet order of the recording. This list is accessible by the STB and the content is understood by the DVD streamer as well as by the STB. In its original version the playlist enables the playback of a complete recording. The playlist may be accessed and extended after recording by the STB to allow more sophisticated playback sequences.

20

2) The second piece of information, a mapping list, is generated to support the stream recorder to retrieve packet stream chunks (cells), that are described in terms of the application domain, e.g. 'broadcast packets' or 'time'. This list is owned and understood by the DVD streamer only.

Content Description

25

[0017] The system should reserve space which can be used by the STB to store high level TOC and Service Information. This information is provided for the user to navigate through the content stored on disc and may contain sophisticated GUI information. The content needs not to be understood by the stream recorder. However a common subset of the TOC information, e.g. based on a character string, may be useful to be shared between STB and DVD, in order to enable the stream recorder to provide a basic menu by itself.

30

[0018] Playback of individual recording and playing all recordings sequentially should be possible via play list.

Player menus for entry point selection

35

[0019] The STB can generate a sophisticated menu based on the TOC information stored on the disc. However, it should be possible to generate a simple menu by the streamer itself, e.g. via some 'character' information which is shared by STB and DVD.

Trick play modes

40

[0020] The STB should be able to steer trick play via the 'play list'. Due to the nature of the broadcast stream, the trick play features may be limited to basic ones, e.g. Time Search and Title Jump.

User defined playback sequence features like programming or parental control can be supported via the play list

45

[0021] The DVD streamer should create the 'original version' of the play list. It also should allow extensions and modifications of the play list by the STB for more sophisticated playback features. The DVD streamer is not responsible for the content of those sophisticated playlist(s).

[0022] The system must support the deletion of single recordings on user's request. If possible, the system should allow this feature under the control of the STB.

The system may support insert editing.

50

[0023] In the simplified overall system of Fig. 1 an application device AD interacts via an interface IF, e.g. an IEEE1394 interface, with a streamer device STRD, i.e. a DVD recorder. A streamer STR within STRD sends its data via output buffering & timestamping handling means BTHO to IF and receives from IF data via input buffering & timestamping handling means BTHI. AD sends its data via output buffering & timestamping handling means BTHO to IF and receives from IF data via input buffering & timestamping handling means BTHIAD.

55

[0024] Concerning the directory and file structure, the organisation of Stream Data and Navigation Data of DVD Stream Recording is done in a specific way such as to take into account the following:

- Any DVD Streamer device STRD has certain requirements to store its own housekeeping data or Streamer-specific navigation data on the disc. These data are solely for helping the retrieval of recorded data; they need not be under-

stood or even be visible to any outside application device AD.

- Any DVD Streamer device STRD needs to communicate with the application device AD it is connected to. This communication should be as universal as possible so that the maximum possible range of applications can be connected to the Streamer. The Navigation Data to support such communication are called Common navigation data and must be understandable by the Streamer as well as by the application device.
- The Streamer device STRD should offer to the connected application device AD a means for storing its own private data of any desired kind. The Streamer needs not to understand any of the content, internal structure, or meaning of this Application-specific navigation data.

[0025] Fig. 2 illustrates a possible directory and file structure where all the data comprising the disc content are. The files storing the disc content are placed under the STRREC directory which is under the root directory. Under the STRREC directory the following files are created:

- **COMMON.IFO**
Basic information to describe the stream content. Needs to be understood by the Application Device as well as the Streamer.
- **STREAMER.IFO**
Private housekeeping information specific to the Streamer Device. Needs not to be understood by the Application Device.
- **APPLICAT.IFO**
Application Private Data, i.e. information that is specific to the Application(s) connected to the Streamer. Needs not to be understood by the Streamer.
- **REALTIME.SOB**
Recorded real-time stream data proper.

[0026] Note that except for the files described above, the STRREC directory shall not contain any other files or directories.

[0027] Concerning the navigation data structure, Navigation data is provided to control the recording, playing back, and editing of any bitstreams that are recorded. As shown in Fig. 3, Navigation Data includes Stream Management Information (SMI) as contained in the file named COMMON.IFO and Housekeeping Information (HKPI) as contained in the file named STREAMER.IFO. From the point of view of the Streamer Device, these two kinds of information are sufficient to perform all necessary operations.

In addition to these, DVD Stream Recording also foresees the possibility of reserving a storage location for Application Private Data (APD), which may in general also be considered as Navigation Data.

SMI and HKPI are the Navigation Data which are directly relevant for the Streamer operation. SMI includes three kinds of information tables, namely Stream Manager General Information (SM_GI), Stream Title Table (STT), and Stream Playlist Table (SPLT), in this order. HKPI includes two kinds of information tables, namely Housekeeping General Information (HKP_GI) and Housekeeping Address Table (HAT), in this order.

There is no restriction in Stream Recording that each table within Navigation Information must be aligned with a sector boundary.

[0028] SM_GI includes information items like end address of SMI, end address of SM_GI, start address of STT and start address of SPLT.

STT includes information items like Number of Stream Titles, End Address of Stream Title Table, Application Packet Size, Service ID, Application Device ID, Stream Duration, Stream Name Search Pointer, Stream Title Names (STN).

SPLT includes information items like Number of Playlists, End address of SPLT, Start Addresses of Playlist Information, Number of Playlist Entries, Index of Stream Title, Start SCR, and End SCR.

[0029] Housekeeping General Information (HKP_GI) includes information items like Number of Housekeeping Address Entries (HAE_Ns), End address of HKPI (HKPI_EA) and Time Scale Factor (HKP_TSCAL).

HAE_Ns describes the number of housekeeping address entries contained in this HKPI. HKPI_EA describes the End Address of this HKPI. HKP_TSCAL describes the time scaling used within this HKPI.

[0030] The purpose of the inventive Housekeeping Address Table (HAT) is to provide all necessary information so that given playlist entries are efficiently translated into disc address pairs, and viceversa.

[0031] It is also possible to include Application Private Data which consist of three kinds of information, namely Application Private Data General Information, a set of one or more Application Private Data Search Pointers, and a set of one or more Application Private Data Area. If any Application Private Data exists, these three kinds of information become recorded and stored in this order in the APPLICAT.IFO file.

[0032] Stream Data include one or more 'Stream Objects' (SOBs) which each can be stored as a 'Program stream' as described in ISO/IEC 13818-1, Systems.

A SOB can be terminated by a program_end_code. The value of the SCR field in the first pack of each SOB may be non-zero. A SOB contains the Stream Data packed into a sequence of 'Stream Packs' (S_PCKs). Stream data can be organised as one elementary stream and are carried in PES packets with a stream_id.

[0033] As shown in Fig. 4 a Stream Pack includes a pack header, eventually followed by a system header, and followed by one Stream Packet (S_PKT). A system header may be included in those S_PCKs which are the first S_PCK of a SOB. When a system header is included, the length of the remaining Stream Pack content is 2010 bytes, when it is not included, the length of Stream Pack content is 2034 bytes.

[0034] A stream Object is composed of one or more Stream Packs.

[0035] The HAT table depicted in Fig. 5 contains for each piece or VOB (VOBU#1 to VOBUn) of the bitstream to be recorded or of the recorded bitstream a corresponding absolute or delta time duration entry ΔDUR#1 to ΔDUR#n. DAC denotes a desired address or target address in the bitstream. VOBUn each concern a constant number of bits of the bitstream.

[0036] The HAT table can have the format of a Stream Time Map Information STMAPI and may include two sub-units: "Stream Time Map General Information" STMAP_GI and one "Mapping List" MAPL. A possible content of STMAPI is shown in Fig. 6. MAPU_SZ describes the size in sectors of the mapping list units. A Mapping Unit Size of e.g. 16 sectors means that the first Mapping List Entry relates to the application packets contained in the first 16 sectors of the Stream, the second Mapping List Entry relates to the application packets contained in the next 16 sectors, and so on.

MTU_SHFT describes the weight of the LSB of the mapping list entries, relative to the bits of the Packet Arrival Time (PAT) Describing Format. MTU_SHFT describes a value between 16 and 36. A value of e.g. "16" means that the LSB of Incremental Application Packet Arrival Time IAPAT has the same weight as PAT_base[0], whereby PAT_base[x] means a PAT base value measured by 90kHz units.

MTU_SHFT depends on MAPU_SZ. MTU_SHFT fulfils the rules:

$$0 \leq 5625 \cdot 2^{34} \cdot \frac{MAPU_SZ}{2^{MTU_SHFT} \cdot max_bitrate} - 1 < 1$$

and

$$16 \leq MTU_SHFT \leq 36$$

wherein

$$max_bitrate = \text{maximum bitrate of the MPEG-2 Program Stream.}$$

[0037] MAPL_ENT_Ns describes the number of Mapping List Entries to follow after STMAP_GI.

S_S_APAT describes the start Application Packet Arrival Time of the Stream, i.e. the packet arrival time of the first packet belonging to the Stream.

S_E_APAT describes the end Application Packet Arrival Time of the Stream, i.e. the packet arrival time of the last packet belonging to the Stream.

[0038] The Mapping List MAPL consists of zero or more "Incremental Application Packet Arrival Times" IAPAT. IAPAT describes the Incremental Application Packet Arrival Time of the corresponding Mapping Unit in DVD Stream Recording's Incremental PAT Describing Format defined in the following:

Let MAPU_S_APAT(i), $1 \leq i \leq MAPL_ENT_Ns$, be the start Application Packet Arrival Time of the Mapping Unit #i, i.e. the packet arrival time of the first packet belonging to the Mapping Unit #i; let MAPU_E_APAT(i) be the last Application Packet Arrival Time of the Mapping Unit #i, i.e. the packet arrival time of the last packet belonging to the Mapping Unit #i and let IAPAT(i) be the i-th IAPAT entry of the Mapping List, i.e. IAPAT(1) is the first entry of the Mapping List. Then IAPAT(i) shall fulfil the rules:

$$0 \leq \left[\sum_{k=1}^i IAPAT(k) \right] - \frac{MAPU_S_APAT(i+1)}{2^{MTU_SHFT}} < 1$$

for $i = 1, 2, \dots, MAPL_ENT_Ns-1$,
and

$$0 < \left[\sum_{k=1}^i IAPAT(k) \right] \cdot \frac{MAPU_E_APAT(i)}{2^{MTU_SHIFT}} \leq 1$$

5 for $i = MAPL_ENT_Ns$,
and

$$0 \leq IAPAT(i) < 2^{12}$$

10 for $i = 1, 2, \dots, MAPL_ENT_Ns$.

[0039] Fig. 7 shows an example of the order of MAPU, MAPU_S_APAT, MAPU_E_APAT and IAPAT. The lower side of the t-axis is divided in IAPAT Time Units and the upper side of the t-axis in the MAPUs.

15 MAPU_S_APAT(i) and MAPU_E_APAT(i) are described in the DVD Stream Recording's PAT Describing Format. For the comparison in the equation above MAPU_S_APAT(i) and MAPU_E_APAT(i) are treated as e.g. 6 byte unsigned integer values. The duration of IAPAT = 1 is the

$$\text{Time Unit of IAPAT} = \frac{2^{MTU_SHIFT}}{5625 \cdot 2^{20}} \text{ seconds.}$$

20

[0040] In Stream recording, the application performs its own padding, so that the pack length adjustment methods of DVD-ROM Video or RTRW need not to be used. In Stream recording it is safe to assume, that the Stream packets will always have the necessary length.

25 The data stream also contains time stamps, e.g. within the data packets.

Claims

1. Method for addressing a bitstream to be recorded or being recorded on a storage medium (STRD), wherein an address table (HAT) is used that is based on pieces (VOBU#n) of said bitstream, characterised by:
 - said pieces (VOBU#n) each include a constant amount of bits of said bitstream;
 - to each address table entry for said pieces an absolute time duration or a delta time duration ($\Delta DUR\#n$) is assigned in said address table using a running index (1, 2, 3, ..., n);
 - 35 - in case of absolute time duration values storage: in order to get an address value for reaching a target address (DAV) the nearest corresponding absolute time duration entry ($\Delta DUR\#i$) of said address table (HAT) is selected and the corresponding running index (i) becomes multiplied by said constant amount in order to compute said address value, or,
 - in case of delta time duration values storage: in order to get an address value for reaching a target address (DAV) all delta time durations ($\Delta DUR\#1, \dots, \Delta DUR\#i$) up to the nearest time duration value corresponding to said address value become accumulated and the running index (i) corresponding to the delta time duration entry ($\Delta DUR\#i$) related to said nearest time duration value becomes multiplied by said constant amount in order to compute said address value.
 - 40
- 45 2. Method according to claim 1, wherein said storage medium (STRD) is a Streamer device or a DVD recorder.
3. Method according to claim 1 or 2, wherein said pieces (VOBU#n) of said bitstream contain data packets and a delta time duration value is the arrival time difference between the last and the first data packet contained in a piece.
- 50 4. Method according to any of claims 1 to 3, wherein the size of a piece corresponds to the number of bits of an ECC block or a multiple thereof.

55

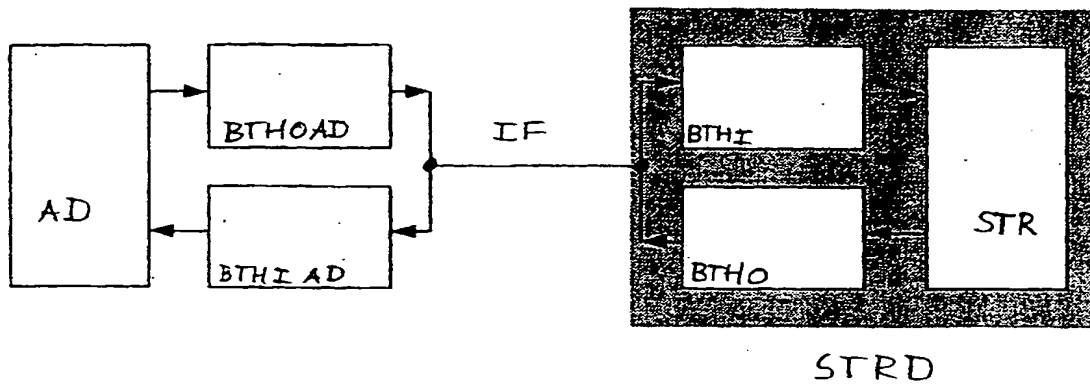


Fig. 1

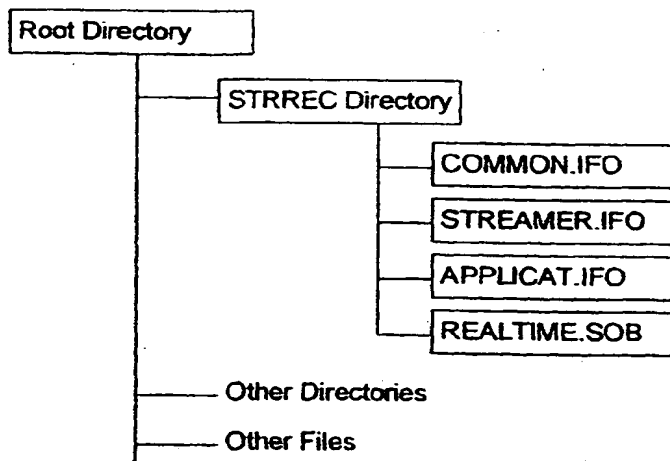


Fig. 2

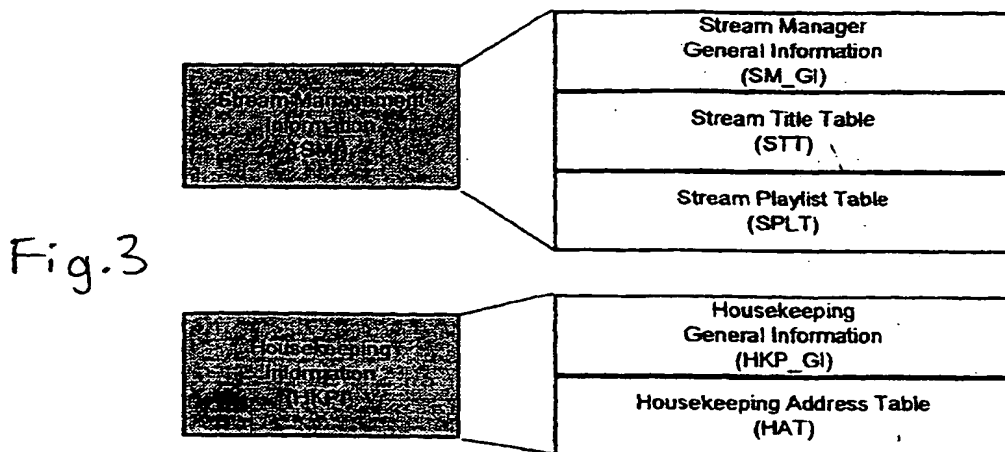


Fig. 3

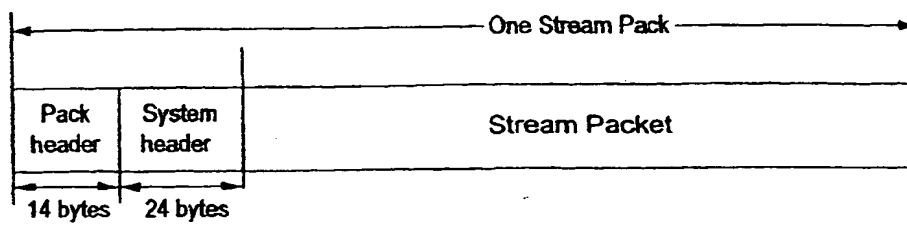


Fig. 4

	VOBU# _n	ΔDUR# _n
DAV →	VOBU# _i	ΔDUR# _i
	VOBU# ₃	ΔDUR# ₃
	VOBU# ₂	ΔDUR# ₂
	VOBU# ₁	ΔDUR# ₁

Fig. 5

	Contents	Number of Bytes
(1) MAPU_SZ	Mapping Unit Size	2
(2) MTU_SHFT	Mapping Time Unit Shift	1
(3) reserved	reserved	1
(4) MAPL_ENT_Ns	Number of Mapping List Entries	4
(5) S_S_APAT	Stream Start APAT	8
(6) S_E_APAT	Stream End APAT	8
	Total	24

Fig. 6

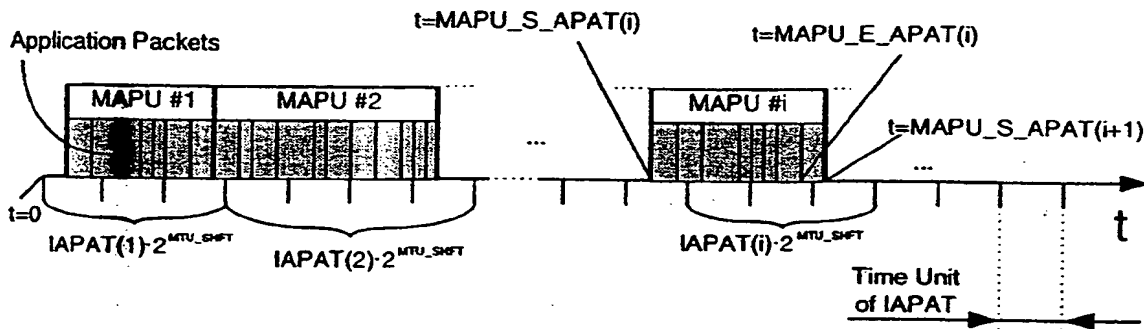


Fig. 7



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 25 0387

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	EP 0 797 204 A (PIONEER ELECTRONIC CORP) 24 September 1997 * page 2, line 28 - page 3, line 4; figure 5 * * page 12, line 25-42 * * page 18, line 31-49 *	1,2,4	G11B27/32 G11B20/12 G11B27/10
Y	FR 2 759 471 A (SONY CORP) 14 August 1998 * page 21, line 21 - page 25, line 12 *	1,2	
Y	* page 11, line 22 - page 12, line 25 *	4	
A	EP 0 729 153 A (HITACHI LTD) 28 August 1996 * column 3, line 45 - column 4, line 13; figure 2 *	1,2	
A	EP 0 673 034 A (SONY CORP) 20 September 1995 * page 25, line 13 - page 28, line 4; figures 34-40 *	1,2	
A	US 5 630 005 A (ORT JEFFREY) 13 May 1997 * claim 1 *	1,2	TECHNICAL FIELDS SEARCHED (Int.Cl.6) G11B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 March 1999	Examiner Mourik, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 25 0387

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-03-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0797204	A	24-09-1997	JP	9251763 A	22-09-1997
FR 2759471	A	14-08-1998	JP	10222316 A	21-08-1998
EP 0729153	A	28-08-1996	JP	8235833 A	13-09-1996
			CN	1135072 A	06-11-1996
EP 0673034	A	20-09-1995	AU	681259 B	21-08-1997
			AU	1824595 A	18-09-1995
			BR	9505853 A	21-02-1996
			CA	2160913 A	08-09-1995
			CN	1115076 A	17-01-1996
			CN	1124062 A	05-06-1996
			EP	0696799 A	14-02-1996
			JP	7311950 A	28-11-1995
			WO	9524037 A	08-09-1995
			PL	311310 A	05-02-1996
			SG	24104 A	10-02-1996
			US	5734787 A	31-03-1998
			US	5592450 A	07-01-1997
			US	5596565 A	21-01-1997
			US	5745505 A	28-04-1998
US 5630005	A	13-05-1997	NONE		

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.